



Traffic Signaling Products

The SPA-303 is a three circuit protective device intended for use on traffic control load relay outputs.




The protector is furnished with three leads and a ground stud.

SPECIFICATIONS

Operating Voltage	120 VAC
Clamping Voltage	395 VAC
Operating Current	NA
Peak Surge Current	39 kA
Operating Frequency	47-63 Hz
EMI Attenuation	NA
SPD Technology	MOVs
Status Indication	NA
Connection Type	Wire Leads
Operating Temperature	-40 C to +85 C
Dimensions (Inches)	2.125H x 1W x 2.125L
Weight	5 oz

**Keeping
You
Connected!**




**NEED HELP?
Call 1-800-648-4076**

1805 N.E. 19th Avenue
P.O. Box 1778
Ocala, Florida 34478
(352) 732-3029
FAX (352) 867-1237
Sales: 1-800-648-4076
E-mail us at:
edco@edcosurge.com
Internet:
<http://www.edcosurge.com>



MOUNTING

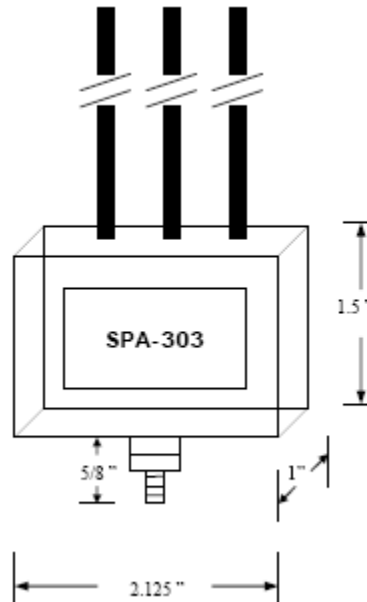

CAUTION: To prevent shock hazard, this product should never be ungrounded (bolt disconnected from ground) when power is applied to leads.